

Lavino Nano Linear Wall Washer

Specification Submittal

Lavino is a compact and powerful wall washer with advanced optics by LEDiL®, designed to wash walls up to 12 feet and taller while maintaining a low Unified Glare Rating (UGR). Lavino includes a patent-pending paintable fixture cover that can bridge up to 150 feet of individual fixtures to create a continuous monolithic fixture look without unsightly seams, or mounts showing. Painting the pre-primed fixture cover to color-match the ceiling will allow the fixture to blend in with its surroundings. Perfect for both accentuation and broad illumination, Lavino blends style with functionality to transform any space.



Project Name:

Project Location:

Fixture Type:

SKUs:




Features & Benefits




- Washes a wall with light through the use of advanced optics by LEDiL
- Powerful output options up to 1,500 lumens per foot
- Continuous fixture lengths up to 8 ft.
- Continuous, paintable fixture cover for spanning multiple fixtures up to 150 feet
- Low unified glare rating (UGR)
- Pivoting and lockable mounting hardware allow the fixture to be mounted at the best angle for maximum effect
- Canopy kit options available

Dimensions Not actual size shown.

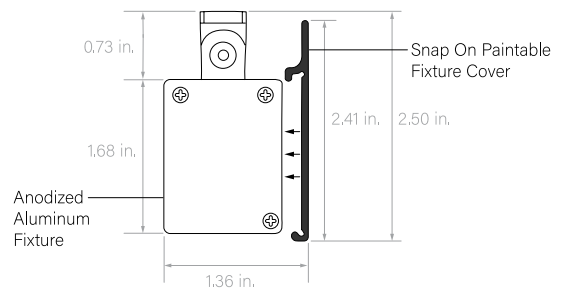Fixture Cross Section



System Builder choose one option for each step.

Prefix	Location	Output	CCT	Lens	Mounting	Finish	Canopy Kit	Length	# of Leads	Lead Length 1	Lead Length 2
OP-SFU-LAV-	I	L14 1429 lm/ft* (15.2W) L12 1366 lm/ft* (12W) L10 1056 lm/ft* (9.6W) <small>* This is for a 3500K tape light</small>	2200K 2400K 2700K 3000K 3500K 4000K 5000K	FRT	MH Supply with Mount Hinge (2-Pack) <small>For every 2 ft. of channel</small> 	ALU	DW Direct Wire CK Matte White Canopy Kit NC No canopy kit required	XXX Length in 1 in. increments <small>- The fixtures come in segments up to 96 in.</small> <small>- Fixtures up to 96 in. will be assembled at the factory</small> <small>- If over 96 in., multiple segments of the profile will be supplied.</small>	1LEAD One lead  2LEAD Two leads (one at each end)  <small>- By default leads come out the end of the fixture. If the lead length is followed by the letter "B" it means the lead will come out the BACK of the fixture</small>	XXX 1-120 in.	XXX 1-120 in. <i>Optional</i>

Fixtures are supplied with Optique's remote Universal power supply supporting 0-10, 1-10V, MLV, ELV dimming and voltage input from 100V-277V. Includes integrated junction box.

Expected to ship in July, 2024

Lavino Nano Linear Wall Washer

Specification Submittal

✦ Photometry

1 ft., 4000K Lavino Nano Linear Fixture


LUMEN SUMMARY

Zone	Lumens	% Fixture
0° - 15°	168 lm	11.76%
0° - 30°	508 lm	35.55%
0° - 45°	847 lm	59.27%
0° - 60°	1123 lm	78.59%
0° - 75°	1310 lm	91.67%
0° - 90°	1391 lm	97.34%


FOOT CANDLES

Distance	Foot Candles
1'	918 fcd
1.5'	408 fcd
2'	230 fcd
2.5'	147 fcd
3'	102 fcd
4'	57 fcd
5'	37 fcd
6'	26 fcd
9'	11 fcd
12'	6 fcd

ANGULAR DISTRIBUTION 0 - 90°

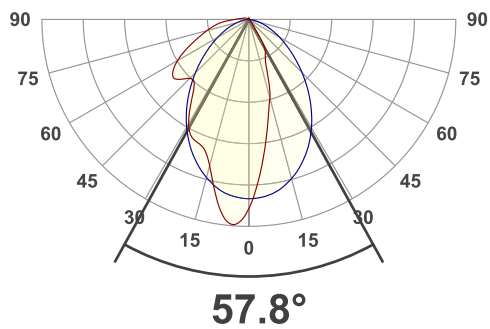

BEAM ANGLE



COLOR VECTOR GRAPHIC

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	97	0%	-1%
2	98	1%	-1%
3	97	0%	0%
4	96	-1%	0%
5	95	-2%	1%
6	97	1%	1%
7	96	0%	1%
8	96	1%	2%
9	95	0%	3%
10	95	0%	3%
11	90	3%	6%
12	93	3%	3%
13	95	4%	-1%
14	95	2%	1%
15	92	3%	-3%
16	90	3%	-5%

