

Perifina Cornice 4 in.

Surface Mounted Crown Molding Luminaire

Specification Submittal

Perifina Cornice 4 in. is a versatile surface-mount luminaire designed to transform any room with its soft halo effect. Inspired by the elegance of crown molding, Perifina Cornice 4 in. offers both aesthetic appeal and practical functionality, making it an ideal choice for various applications.




*For Select
Light Engines

Project Name:

Project Location:

Fixture Type:

SKUs:

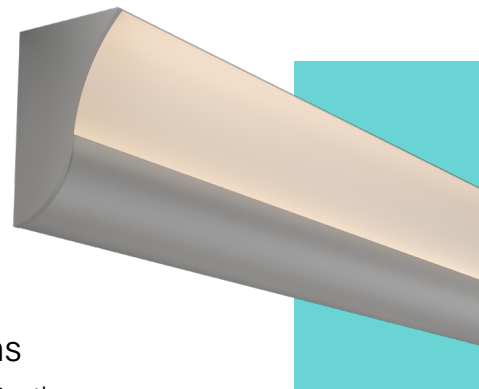


Features & Benefits

- Designed for use as an illuminated crown molding or as an ADA-compliant sconce
- Easy installation just place against the wall or ceiling and screw into place
- Paintable surface ensures seamless integration with any décor or color palette
- Integrated wire run provides space for cabling.
- Superior color rendering
- High R9 and R13 values
- 2-step MacAdam ellipse for unparalleled quality and consistency
- Complete UL Listed Luminaire

Dimensions

Fixture Cross Section

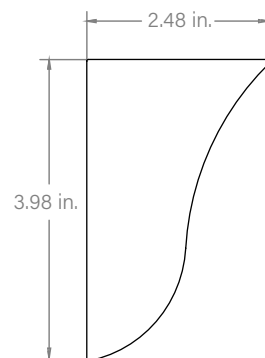

System Builder

Prefix	Location	Output	CCT	Lens	Finish	Length (Minimum 2 ft.)	Lead	Lead Length 1	Lead Length 2
OP-SFU-CRN4	I	<p><i>White Light</i></p> <p>L1 - 100± lm/ft (1.0W) L2 - 200± lm/ft (2.0W) L3 - 300± lm/ft (3.1W) L4 - 400± lm/ft (4.3W) L6 - 600± lm/ft (6.6W) L8 - 800± lm/ft (7.6W) L10 - 1000± lm/ft (9.6W) L12 - 1250± lm/ft (12.0W) L15 - 1500± lm/ft (15.2W)</p> <p><i>RGBW+</i></p> <p>RGBW3 - 300- lm/ft (5.0W) RGBW4 - 400+ lm/ft (7.7W) RGBW5 - 500+ lm/ft (10.2W)</p> <p><i>Tunable</i></p> <p>L2 - 200+ lm/ft (3.4W) L5 - 500+ lm/ft (6.0W)</p>	<p><i>White Light</i></p> <p>2200K 2400K 2700K 3000K 3500K 4000K 5000K</p> <p><i>RGBW+</i></p> <p>3000K</p> <p><i>Tunable</i></p> <p>30-18K</p>	<p>FRT Frosted</p> <p>CLR Clear</p>	ALU	<p>XXX Length in 1 in. increments</p> <p>- The fixtures come in segments up to 96 in.</p> <p>- Fixtures up to 96 in. will be assembled at the factory</p> <p>- If over 96 in., multiple segments of the profile will be supplied.</p>	<p>1LEAD One lead</p> <p>2LEAD Two leads (one at each end)</p> <p>- By default leads come out the end of the fixture. If the lead length is followed by the letter "B" it means the lead will come out the BACK of the fixture</p>	<p>XXX 1-120 in.</p>	<p>XXX 1-120 in.</p>

Fixtures are supplied with Optique's remote Universal power supply supporting 0-10, 1-10V, MLV, ELV dimming and voltage input from 100V-277V.

Perifina Cornice 4 in.

Surface Mounted Crown Molding Luminaire

Specification Submittal



Output

Indoor

White Light

Output (lm/ft)		L1	L2	L3	L4	L6	L8	L10	L12	L15
Lumens (per ft.)	2200K	94	198	284	421	661	779	956	1179	1410
	2400K	95	200	309	423	628	777	951	1205	1451
	2700K	105	238	369	495	747	908	1103	1194	1667
	3000K	110	229	358	492	718	941	1183	1453	1932
	3500K	116	239	374	523	770	911	1055	1384	1664
	4000K	119	248	377	520	781	962	1221	1494	1835
	5000K	120	252	378	526	783	984	1194	1498	1829
Wattage (per ft.)		1.0	2.0	3.1	4.2	6.6	7.5	9.5	12.0	15.1
Max Run Length* (ft.)		68	42	30	22	14	12	10	8	6
Closet Rated		✓	✓	✓	✓	✓	-	-	-	-

RGBW+

Output (lm/ft)		RGBW3	RGBW4	RGBW5
Lumens (per ft.)	All LEDs on	272	394	507
	White Only	140	208	279
Wattage (per ft.)		5.0	7.7	10.2
Max Run Length* (ft.)		19	12	9

Tunable

Output (lm/ft)		L2	L5
Lumens (per ft.)	30-18K	324	562
Wattage (per ft.)		3.4	6.0
Max Run Length* (ft.)		20	12
Closet Rated		✓	✓

*Maximum individual fixture per power feed.