

## Perifina Edge Reveal 3 in.

### Recessed Mud-In Vanishing Trim Luminaire

#### Specification Submittal

Perifina Edge Reveal 3 in. creates an illuminated effect on the edges of walls such as toe-kicks and creates an illuminated cove at the top of walls. It is compatible with 5/8 in. drywall, easy to install, and unlike most solutions on the market, Perifina Edge Reveal 3 in. can easily go around corners without light gaps or the need for complicated soldering.




Project Name:

Project Location:

Fixture Type:

SKUs:

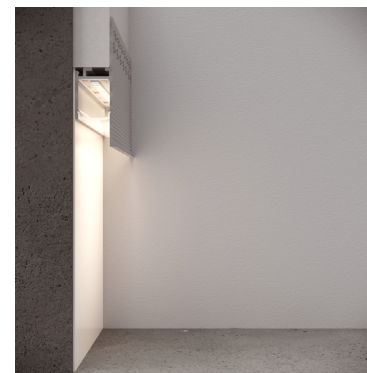


#### Features & Benefits

- Designed to easily wrap around corners with no light gaps and no soldering
- Paintable backing plate ensures it blends in with any decor or color palette
- Superior color rendering
- High R9 and R13 values
- 2-step MacAdam ellipse for unparalleled quality and consistency
- Complete UL listed luminaire

#### Dimensions

##### Fixture Cross Section



#### System Builder

Prefix	Location	Output	CCT	Lens	Finish	Length (Minimum 2 ft.)	Lead	Lead Length
OP-REC-ER3	I	<p>White Light</p> <p><b>L1</b> 100± lm/ft (1.0W)</p> <p><b>L2</b> 200± lm/ft (2.0W)</p> <p><b>L3</b> 300± lm/ft (3.1W)</p> <p>RGBW+</p> <p><b>RGBW3</b> 300± lm/ft (5.0W)</p> <p><b>RGBW4</b> 400± lm/ft (7.7W)</p> <p><b>RGBW5</b> 500± lm/ft (10.2W)</p> <p>Tunable</p> <p><b>L2</b> 200± lm/ft (3.4W)</p> <p><b>L5</b> 500± lm/ft (6.0W)</p>	<p>White Light</p> <p><b>2200K</b></p> <p><b>2400K</b></p> <p><b>2700K</b></p> <p><b>3000K</b></p> <p><b>3500K</b></p> <p><b>4000K</b></p> <p><b>5000K</b></p> <p>RGBW+</p> <p><b>3000K</b></p> <p>Tunable</p> <p><b>30-18K</b></p>	FRT	ALU	<p>XXX Length in 1 in. increments</p> <p>– Length is calculated by adding together lens length of all sections separated by a corner cut</p> <p>– The fixtures come in segments up to 96 in.</p> <p>– If over 96 in., multiple segments of the profile will be supplied. The light engine will be cut to length with standard 3 ft. leads</p>	1LEAD	<p>XXX 1-120 in.</p>

Fixtures are supplied with Optique's remote Universal power supply supporting 0-10, 1-10V, MLV, ELV dimming and voltage input from 100V-277V.

# Perifina Edge Reveal 3 in.

## Recessed Mud-In Vanishing Trim Luminaire

### Specification Submittal



## Output

Indoor

White Light

L-Level		L1	L2	L3
Lumens (per ft.)	2200K	94	198	284
	2400K	95	200	309
	2700K	105	238	369
	3000K	110	229	358
	3500K	116	239	374
	4000K	119	248	377
	5000K	120	252	378
Wattage (per ft.)		1.0	2.0	3.1
Max Run Length* (ft.)		68	42	30

RGBW+

Output (lm/ft)		RGBW3	RGBW4	RGBW5
Lumens (per ft.)	3000K	272	394	507
Wattage (per ft.)		5.0	7.7	10.2
Max Run Length* (ft.)		19	12	9

Tunable

Output (lm/ft)		L2	L5
Lumens (per ft.)	30-18K	324	562
Wattage (per ft.)		3.4	6.0
Max Run Length* (ft.)		20	12

\*Maximum individual fixture per power feed.