

Perifina Wall Accent 2 in., 3 in., & 4 in.

Recessed Mud-In Wall Luminaire

Specification Submittal

Available in three sizes, Perifina Wall Accent is beautifully crafted with a scoop design that creates an attractive light gradient. It is compatible with 5/8 in. and 1/2 in. drywall, easy to install, and unlike most solutions on the market, Perifina Wall Accent can easily go around corners without light gaps or the need for complicated soldering.

- Perifina Wall Accent 2 in:** Narrower aperture, compatible with 5/8 in. drywall.
- Perifina Wall Accent 3 in:** Dual compatibility, making it suitable for both 1/2 in. and 5/8 in. drywall.
- Perifina Wall Accent 4 in:** Wider aperture, suitable for larger ceilings, compatible with 5/8 in. drywall.




Project Name:

Project Location:

Fixture Type:

SKUs:




Features & Benefits

- Designed to easily wrap around corners with no light gaps
- Paintable surface ensures seamless integration with any décor or color palette
- Superior color rendering
- High R9 and R13 values
- 2-step MacAdam ellipse for unparalleled quality and consistency
- Complete UL listed luminaire


Dimensions

Fixture Cross Section


WALL ACCENT 4 in.

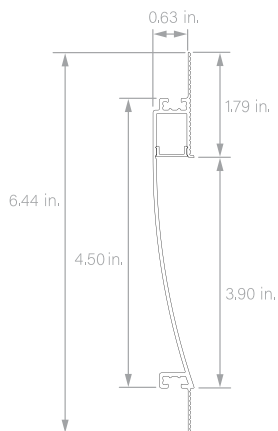

WALL ACCENT 3 in. *

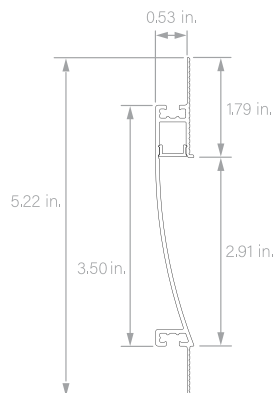

WALL ACCENT 2 in.

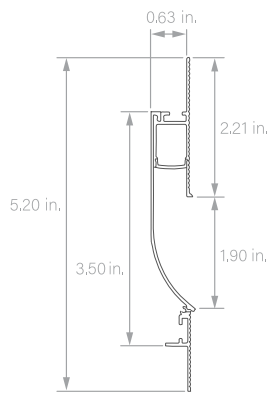


*Wall Accent 3 in. is the only model compatible with both 1/2 in. and 5/8 in. drywall.

Perifina Wall Accent 2 in.

Recessed Mud-In Wall Luminaire

Specification Submittal



System Builder

Prefix	Location	Output	CCT	Lens	Finish	Length (Minimum 2 ft.)	Lead	Lead Length
OP-REC-WA2	I	White Light L1 100± lm/ft (1.0W) L2 200± lm/ft (2.0W) L3 300± lm/ft (3.1W) RGBW+ RGBW3 300± lm/ft (5.0W) RGBW4 400± lm/ft (7.7W) RGBW5 500+ lm/ft (10.2W) Tunable L2 200+ lm/ft (3.4W) L5 500+ lm/ft (6.0W)	White Light 2200K 2400K 2700K 3000K 3500K 4000K 5000K RGBW+ 3000K Tunable 30-18K	FRT	ALU	XXX Length in 1 in. increments	1LEAD	XXX 1-120 in.

Fixtures are supplied with Optique's remote Universal power supply supporting 0-10, 1-10V, MLV, ELV dimming and voltage input from 100V-277V.

Perifina Wall Accent 2 in.

Recessed Mud-In Wall Luminaire

Specification Submittal



Output

Indoor

White Light

L-Level		L1	L2	L3
Lumens (per ft.)	2200K	94	198	284
	2400K	95	200	309
	2700K	105	238	369
	3000K	110	229	358
	3500K	116	239	374
	4000K	119	248	377
	5000K	120	252	378
Wattage (per ft.)		1.0	2.0	3.1
Max Run Length* (ft.)		68	42	30

RGBW+

Output (lm/ft)		RGBW3	RGBW4	RGBW5
Lumens (per ft.)	3000K	272	394	507
Wattage (per ft.)		5.0	7.7	10.2
Max Run Length* (ft.)		19	12	9

Tunable

Output (lm/ft)		L2	L5
Lumens (per ft.)	30-18K	324	562
Wattage (per ft.)		3.4	6.0
Max Run Length* (ft.)		20	12

*Maximum individual fixture per power feed.

Perifina Wall Accent 3 in.

Recessed Mud-In Wall Luminaire

Specification Submittal



i System Builder

Prefix	Location	Output	CCT	Lens	Finish	Length (Minimum 2 ft.)	Lead	Lead Length
OP-REC-WA3	I	White Light L1 100± lm/ft (1.4W) L2 200± lm/ft (2.8W) L3 300± lm/ft (4.3W) L4 400± lm/ft (5.5W) L6 600± lm/ft (7.0W) RGB / RGBW+ RGB1 100± lm/ft (2.1W) RGBW2 200± lm/ft (4.7W)	White Light 2200K 2400K 2700K 3000K 3500K 4200K 5000K RGB / RGBW+ 3000K	FRT Frosted CLR Clear	ALU	XXX Length in 1 in. increments	1LEAD	XXX 1-120 in.

Fixtures are supplied with Optique's remote Universal power supply supporting 0-10, 1-10V, MLV, ELV dimming and voltage input from 100V-277V.

Perifina Wall Accent 3 in.

Recessed Mud-In Wall Luminaire

Specification Submittal



Output

Indoor

White Light

Output (lm/ft)		L1	L2	L3	L4	L6
Lumens (per ft.)	2200K	87	170	N/A	N/A	534
	2400K	92	178	N/A	N/A	610
	2700K	104	207	294	457	688
	3000K	109	234	347	465	707
	3500K	115	233	N/A	459	736
	4200K	N/A	N/A	361	477	N/A
	5000K	N/A	N/A	379	462	N/A
Wattage (per ft.)		1.4	2.8	4.3	5.5	7.0
Max Run Length* (ft.)		67	33	26	13	22

RGBW+

Output (lm/ft)		RGB1	RGBW2
Lumens (per ft.)	All LEDs on	83	229
	White Only	N/A	229
Wattage (per ft.)		2.1	4.7
Max Run Length* (ft.)		16.4	16.4

*Maximum individual fixture per power feed.

Perifina Wall Accent 4 in.

Recessed Mud-In Wall Luminaire

Specification Submittal



System Builder

Prefix	Location	Output	CCT	Lens	Finish	Length (Minimum 2 ft.)	Lead	Lead Length
OP-REC-WA4	I				ALU		1LEAD	
		White Light	White Light	FRT		XXX		XXX
		L1	2200K	Frosted		Length in 1 in.		1-120 in.
		100± lm/ft (1.0W)	2400K	CLR		increments		
		L2	2700K					
		200± lm/ft (2.0W)	3000K					
		L3	3500K					
		300± lm/ft (3.1W)	4000K					
			5000K					
		RGBW+	RGBW+					
		RGBW3	3000K					
		300± lm/ft (5.0W)						
		RGBW4						
		400± lm/ft (7.7W)						
		RGBW5						
		500+ lm/ft (10.2W)						
		Tunable	Tunable					
		L2	30-18K					
		200+ lm/ft (3.4W)						
		L5						
		500+ lm/ft (6.0W)						

Fixtures are supplied with Optique's remote Universal power supply supporting 0-10, 1-10V, MLV, ELV dimming and voltage input from 100V-277V.

Perifina Wall Accent 4 in.

Recessed Mud-In Wall Luminaire

Specification Submittal



Output

Indoor

White Light

L-Level		L1	L2	L3
Lumens (per ft.)	2200K	94	198	284
	2400K	95	200	309
	2700K	105	238	369
	3000K	110	229	358
	3500K	116	239	374
	4000K	119	248	377
	5000K	120	252	378
Wattage (per ft.)		1.0	2.0	3.1
Max Run Length* (ft.)		68	42	30

RGBW+

Output (lm/ft)		RGBW3	RGBW4	RGBW5
Lumens (per ft.)	3000K	272	394	507
Wattage (per ft.)		5.0	7.7	10.2
Max Run Length* (ft.)		19	12	9

Tunable

Output (lm/ft)		L2	L5
Lumens (per ft.)	30-18K	324	562
Wattage (per ft.)		3.4	6.0
Max Run Length* (ft.)		20	12

*Maximum individual fixture per power feed.