


Perifina Curved Corner 3 in. & 4 in.

Recessed Mud-In Corner Cove Luminaire

Specification Submittal

Featuring beautiful soft indirect light and available in two sizes, Perifina Curved Corner is a compact corner-mounted recessed cove luminaire with an illuminated reveal that illuminates corners at wall-to-wall and wall-to-ceiling intersections.

- Perifina Curved Corner 3 in:** Narrower aperture suitable for projects can be used with 1/2 in. and 5/8 in. drywall.
- Perifina Curved Corner 4 in:** Wider aperture suitable for larger ceiling can be used only with 5/8 in. drywall.

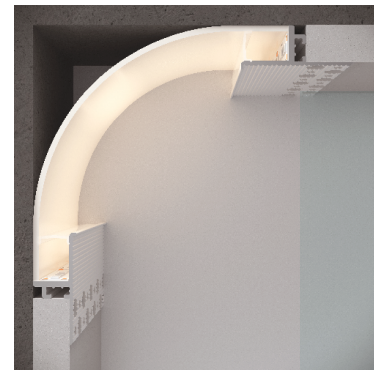


Features & Benefits

- Superior color rendering
- High R9 and R13 values
- 2-step MacAdam ellipse for unparalleled quality and consistency
- Paintable surface ensure seamless integration with any décor or color palette
- Complete UL Listed luminaire

Dimensions

Fixture Cross Section

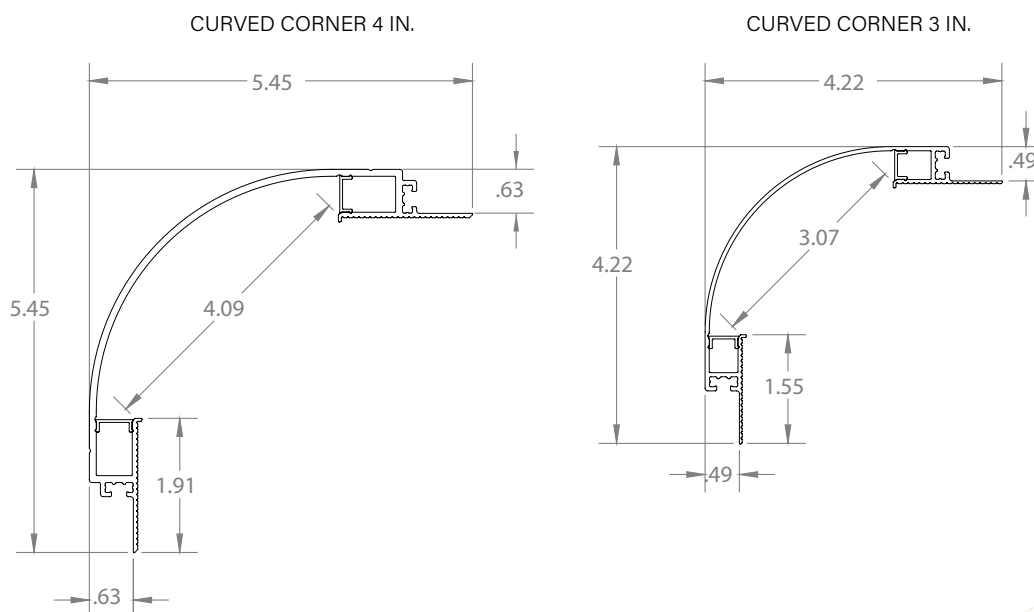

Project Name:

Project Location:

Fixture Type:

SKUs:

Perifina Curved Corner 3 in.

Recessed Mud-In Corner Cove Luminaire

Specification Submittal

System Builder

Prefix	Location	Output	CCT	Lens	Finish	Length (Minimum 2 ft.)	Lead	Lead Length
OP-REC-MIC3	I	<i>White Light</i> L2 200± lm/ft (2.8W) L4 400± lm/ft (5.7W) L6 600± lm/ft (8.6W) <i>RGBW+</i> RGB2 200 ± lm/ft (4.3W) RGBW4 400± lm/ft (9.4W)	<i>White Light</i> 2200K 2400K 2700K 3000K 3500K 4200K 5000K <i>RGBW+</i> 3000K	FRT Frosted CLR Clear	ALU	XXX Length in 1 in. increments <i>– The fixtures come in segments up to 96 in.</i> <i>– Fixtures up to 96 in. will be assembled at the factory</i> <i>– If over 96 in., multiple segments of the profile will be supplied.</i>	1LEAD	XXX 1-120 in.

Fixtures are supplied with Optique's remote Universal power supply supporting 0-10, 1-10V, MLV, ELV dimming and voltage input from 100V-277V.

Perifina Curved Corner 3 in.

Recessed Mud-In Corner Cove Luminaire

Specification Submittal



Output

Indoor

White Light

Output (lm/ft)		L2	L4	L6
Lumens (per ft.)	2200K	174	340	N/A
	2400K	184	356	N/A
	2700K	208	414	588
	3000K	218	468	694
	3500K	230	466	N/A
	4200K	238	480	722
	5000K	242	488	758
Wattage (per ft.)		2.8	5.7	8.6
Max Run Length* (ft.)		42	22	26

RGBW+

Output (lm/ft)		RGB2	RGBW4
Lumens (per ft.)	All LEDs on	166.6	458
	White Only	N/A	458
Wattage (per ft.)		4.3	9.4
Max Run Length* (ft.)		16.4	16.4

*Maximum individual fixture per power feed.

Perifina Curved Corner 4 in.

Recessed Mud-In Corner Cove Luminaire

Specification Submittal

i System Builder

Prefix	Location	Output	CCT	Lens	Finish	Length (Minimum 2 ft.)	Lead	Lead Length
OP-REC-MIC4	I	<i>White Light</i> L2 200± lm/ft (2.0W) L4 400± lm/ft (4.0W) L6 600± lm/ft (6.2W) <i>RGBW+</i> RGBW6 600± lm/ft (10.0W) RGBW8 800± lm/ft (15.4W) RGBW10 1000+ lm/ft (20.4W) <i>Tunable</i> L4 400+ lm/ft (6.8W) L10 1000+ lm/ft (12.0W)	<i>White Light</i> 2200K 2400K 2700K 3000K 3500K 4000K 5000K <i>RGBW+</i> 3000K <i>Tunable</i> 30-18K	FRT Frosted CLR Clear	ALU	XXX Length in 1 in. increments – The fixtures come in segments up to 96 in. – Fixtures up to 96 in. will be assembled at the factory – If over 96 in., multiple segments of the profile will be supplied.	1LEAD	XXX 1-120 in.

Fixtures are supplied with Optique's remote Universal power supply supporting 0-10, 1-10V, MLV, ELV dimming and voltage input from 100V-277V.

Perifina Curved Corner 4 in.

Recessed Mud-In Corner Cove Luminaire

Specification Submittal



Output

Indoor

White Light

Output (lm/ft)		L2	L4	L6
Lumens (per ft.)	2200K	187	395	568
	2400K	191	399	619
	2700K	210	477	738
	3000K	219	458	715
	3500K	233	478	748
	4000K	239	496	755
	5000K	239	503	756
Wattage (per ft.)		2.0	4.0	6.2
Max Run Length (ft.)		42	22	14

RGBW+

Output (lm/ft)		RGBW6	RGBW8	RGBW10
Lumens (per ft.)	3000K	544	788	1014
Wattage (per ft.)		10.0	15.4	20.4
Max Run Length*(ft.)		19	12	9

Tunable

Output (lm/ft)		L4	L10
Lumens (per ft.)	30-18K	648	1124
Wattage (per ft.)		6.8	12.0
Max Run Length* (ft.)		20	12

*Maximum individual fixture per power feed.