

OPTIQUE

Velino.0 Slat

5/8" - Slat Walls & Ceilings Asymmetrical - Dark Optics



Velino.0 Slat

*5/8" - Slat Walls & Ceilings Asymmetrical -
Dark Optics*

Specification Submittal

A 5/8" luminaire designed to deliver directional illumination with slat walls and ceilings with a 3/4" or wider gap. Velino.0 Slat with asymmetric dark optics provides targeted, glare-free lighting ideal for wall washing, accents, signage, and vertical illumination—all while maintaining a clean architectural integration.




Project Name:

Project Location:

Fixture Type:


SKUs:

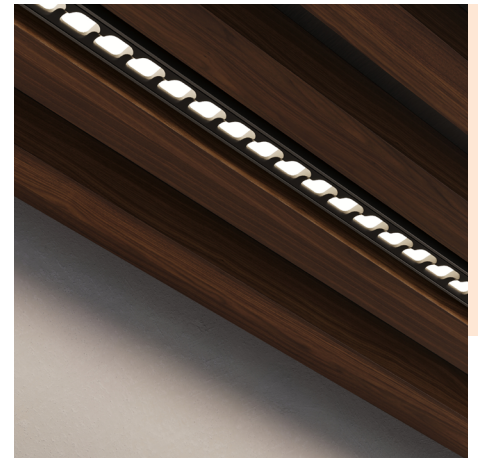

Features & Benefits

- Designed for slat walls or ceilings with 3/4" or wider gaps
- Asymmetric Dark Optics provide targeted, glare-free illumination ideal for wall-washing and focal features
- A glare-shield conceals the light source for a comfortable, low-brightness appearance that enhances visual comfort
- Slim 5/8" profile fits cleanly between wood slats
- Available in 4 ft. and 8 ft. lengths, or custom sizes up to 100 in. for continuous runs
- Available in anodized aluminum, matte black, gloss white, or special order RAL colors
- 24V DC operation; compatible with Triac, ELV, 0-10V, DMX, Casambi, and Silvar controls
- Factory-assembled up to 100 in. for faster installation and cost-efficient shipping
- Superior color rendering
- High R9 and R13 values
- Complete UL Listed Luminaire

Fixture Dimensions




Fixture Cross Section



Velino.0 Slat

5/8" - Slat Walls & Ceilings Asymmetrical -
Dark Optics

Specification Submittal



i Luminaire System Builder

Prefix	Location	Mount	Optics	Output	CCT	Finish	Length	Leads	Lead Length 1	Lead Length 2
OP-REC-V0	I	RS58	DA	<p>White Light</p> <p>L7 700± lm/ft (4W)</p> <p>L10 1000± lm/ft (6W)</p>	<p>White Light</p> <p>2700K 3000K 3500K 4000K</p>	<p>ALU - Quick Ship Anodized Aluminum</p> <p>GLW - Quick Ship Powder Coated Gloss White</p> <p>ABL - Quick Ship Anodized Matte Black</p> <p>RALXXXX Specify Color</p>	<p>XXX Length in 1 in. increments</p> <p>- The fixtures come in segments up to 100 in.</p> <p>- If over 100 in., multiple segments of the profile will be supplied, including the required joiners for field assembly.</p>	<p>1LEAD One lead</p>  <p>2LEAD Two leads</p>  <p>- By default leads come out the Top of the fixture.</p>	XXX 1-120 in.	XXX 1-120 in.

Fixtures are supplied with Optique's remote Universal power supply supporting 0-10, 1-10V, MLV, ELV dimming and voltage input from 100V-277V.



Velino.0 Slat

5/8" - Slat Walls & Ceilings Asymmetrical - Dark Optics

Specification Submittal

i Dark Optics Options

DA
Dark Optic Asymmetric beam for wall-wash

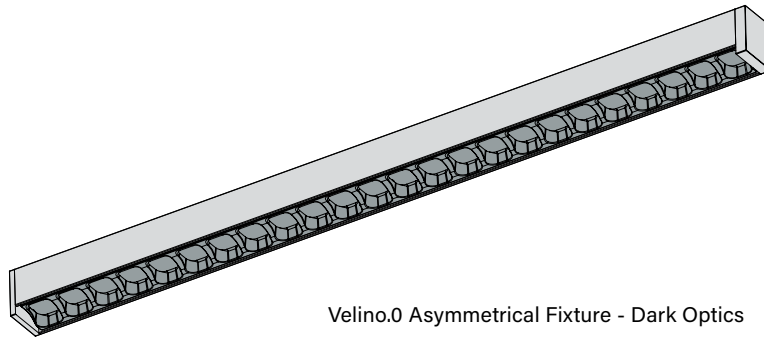

Velino.0 Asymmetrical Fixture - Dark Optics

Velino.0 Slat

5/8" - Slat Walls & Ceilings Asymmetrical - Dark Optics

Specification Submittal

Output

Indoor

White Light

Output (lm/ft)		L7	L10
Lumens (per ft.)	2700K	446.19	627.69
	3000K	480.89	684.70
	3500K	527.76	755.22
	4000K	547.76	769.40
Wattage (per ft.)		4.36	6.52

Output (CD)		L7	L10
Candelas	2700K	456.88	642.58
	3000K	491.58	702.10
	3500K	539.16	768.75
	4000K	557.77	782.08
Wattage (per ft.)		4.36	6.52

Velino.0 Slat


5/8" - Slat Walls & Ceilings Asymmetrical - Dark Optics

Specification Submittal


◆ Photometry

LIGHT DISTRIBUTION

Velino.0 Slat Ceilings Asymmetrical - Dark Optics

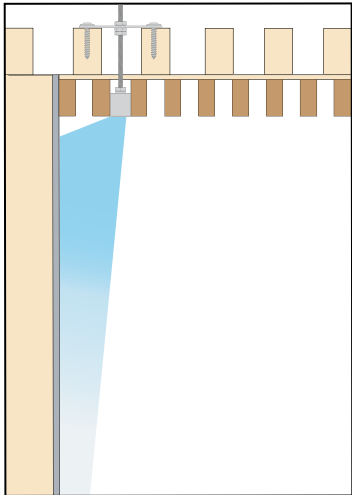


Side view

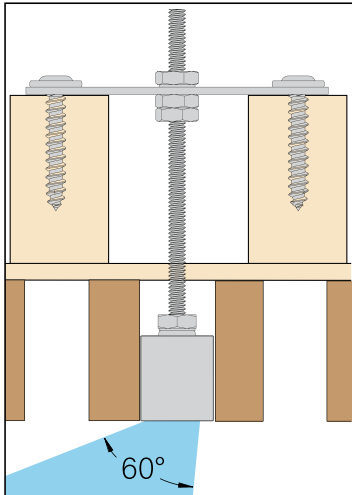

LIGHT DISTRIBUTION

Velino.0 Slat Ceilings Asymmetrical - Dark Optics

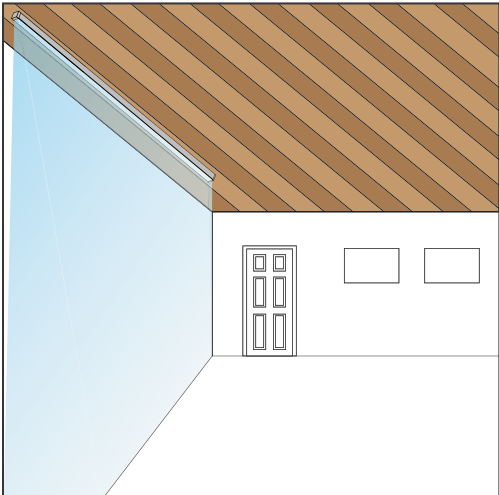

Light spread representation

Velino.0 Slat

5/8" - Slat Walls & Ceilings Asymmetrical - Dark Optics

Specification Submittal


◆ Photometry

DA = Dark Optic Asymmetric - (Asymmetric beam for wall-washing), L10 - 3500K

LUMEN SUMMARY


Zone	Lumens	% Fixture
75° - 90°	1.43 lm	0.19%
60° - 75°	27.6 lm	3.66%
45° - 60°	130 lm	17.24%
30° - 45°	261 lm	34.62%
15° - 30°	243 lm	32.23%
0° - 15°	87.8 lm	11.64%

ANGULAR DISTRIBUTION

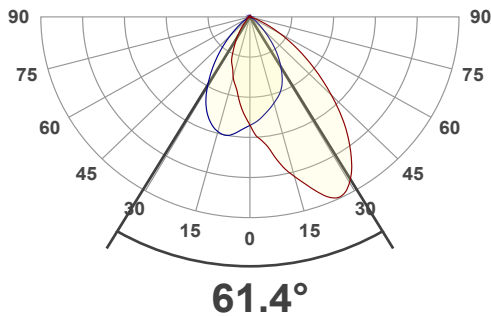

COLOR VECTOR GRAPHIC

Hue Bin	R _r	Graphic shifts (%)	
		Chroma	Hue
1	95	-1%	0%
2	96	1%	-1%
3	94	0%	-1%
4	94	-2%	-3%
5	93	-5%	0%
6	95	1%	3%
7	93	0%	4%
8	94	3%	3%
9	94	2%	3%
10	94	2%	4%
11	92	4%	3%
12	88	6%	-5%
13	89	1%	-9%
14	90	2%	-7%
15	90	0%	-3%
16	90	1%	-5%

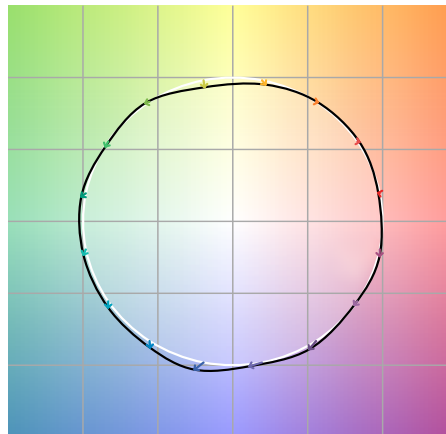

□ Reference ■ Test