

OPTIQUE

Velino.0 Surface

Surface-Mount Asymmetrical - Dark Optics



Velino.0 Surface

Surface-Mount Asymmetrical - Dark Optics

Specification Submittal

A compact surface-mount linear luminaire featuring asymmetric dark optics for precise, directional illumination. Ideal for wall washing, artwork, shelving displays, signage, and architectural accents, Velino.0 Surface with asymmetric dark optics delivers targeted, glare-free light in applications where control and visual comfort are essential.



Project Name:

Project Location:

Fixture Type:


SKUs:



Features & Benefits

- Surface-mount design ideal for drywall, millwork, shelving, and cabinetry
- Asymmetric Dark Optics provide targeted, glare-free illumination ideal for wall-washing, signage, pathways, and visual-task emphasis
- A glare-shield conceals the light source for a comfortable, low-brightness appearance that enhances visual comfort
- Available in 4 ft. and 8 ft. lengths, or custom sizes up to 100 in. for continuous runs
- Available in anodized aluminum, matte black, gloss white, or special order RAL colors
- 24V DC operation; compatible with Triac, ELV, 0-10V, DMX, Casambi, and Silvar controls
- Factory-assembled up to 100 in. for faster installation and cost-efficient shipping
- Superior color rendering
- High R9 and R13 values
- Complete UL Listed Luminaire

Fixture Dimensions



Fixture Cross Section







Velino.0 Surface

Surface-Mount Asymmetrical - Dark Optics

Specification Submittal



i Luminaire System Builder

Prefix	Location	Mount	Optics	Output	CCT	Finish	Length	Leads	Lead Length 1	Lead Length 2
OP-SFU-V0	I	SF	DA							
			DA Dark Optic Asymmetric - (Asymmetric beam for wall-wash)	<i>White Light</i> L7 700± lm/ft (4W) L10 1000± lm/ft (6W)	<i>White Light</i> 2700K 3000K 3500K 4000K	 ALU - Quick Ship Anodized Aluminum  GLW - Quick Ship Powder Coated Gloss White  ABL - Quick Ship Anodized Matte Black  RALXXXX Specify Color	XXX Length in 1 in. increments - The fixtures come in segments up to 100 in.	1LEAD One lead  2LEAD Two leads 	XXX 1-120 in.	XXX 1-120 in.

Fixtures are supplied with Optique's remote Universal power supply supporting 0-10, 1-10V, MLV, ELV dimming and voltage input from 100V-277V.

Velino.0 Surface



Surface-Mount Asymmetrical - Dark Optics

Specification Submittal

i Dark Optics Options

DA

Dark Optic Asymmetric beam for wall-wash

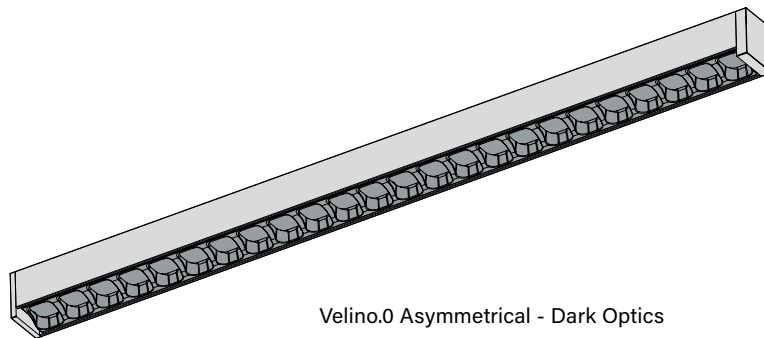

Velino.0 Asymmetrical - Dark Optics

Velino.0 Surface

Surface-Mount Asymmetrical - Dark Optics

Specification Submittal

Output

Indoor

White Light

Output (lm/ft)		L7	L10
Lumens (per ft.)	2700K	446.19	627.69
	3000K	480.89	684.70
	3500K	527.76	755.22
	4000K	547.76	769.40
Wattage (per ft.)		4.36	6.52

Output (CD)		L7	L10
Candelas	2700K	456.88	642.58
	3000K	491.58	702.10
	3500K	539.16	768.75
	4000K	557.77	782.08
Wattage (per ft.)		4.36	6.52

Velino.0 Surface


Surface-Mount Asymmetrical - Dark Optics

Specification Submittal


✦ Photometry

LIGHT DISTRIBUTION

Velino.0 Surface-Mount Asymmetric Dark Optics

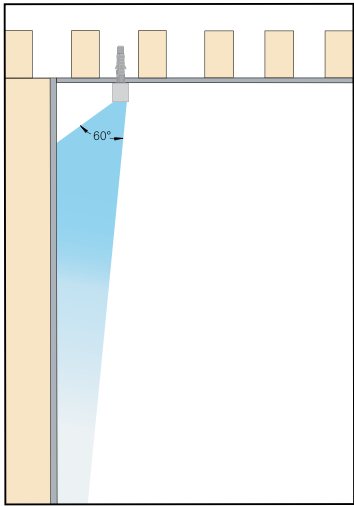


Side view

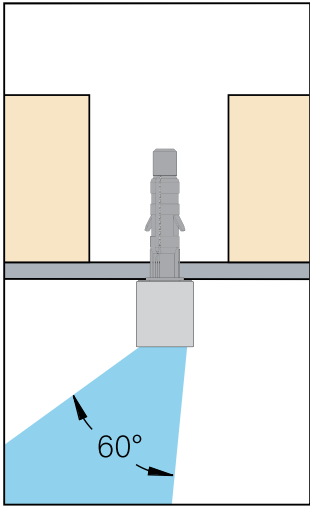

LIGHT DISTRIBUTION

Velino.0 Surface-Mount Asymmetric Dark Optics

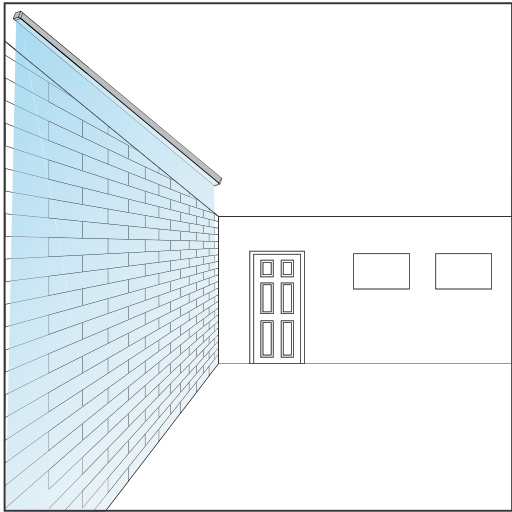

Light spread representation

Velino.0 Surface

Surface-Mount Asymmetrical - Dark Optics

Specification Submittal


◆ Photometry

DA = Dark Optic Asymmetric - (Asymmetric beam for wall-washing), L10 - 3500K

LUMEN SUMMARY

Zone	Lumens	% Fixture
75° - 90°	1.43 lm	0.19%
60° - 75°	27.6 lm	3.66%
45° - 60°	130 lm	17.24%
30° - 45°	261 lm	34.62%
15° - 30°	243 lm	32.23%
0° - 15°	87.8 lm	11.64%

ANGULAR DISTRIBUTION

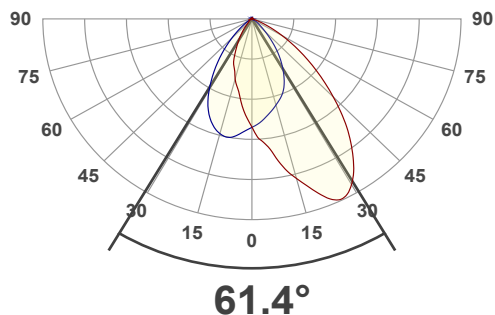

COLOR VECTOR GRAPHIC

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	95	-1%	0%
2	96	1%	-1%
3	94	0%	-1%
4	94	-2%	-3%
5	93	-5%	0%
6	95	1%	3%
7	93	0%	4%
8	94	3%	3%
9	94	2%	3%
10	94	2%	4%
11	92	4%	3%
12	88	6%	-5%
13	89	1%	-9%
14	90	2%	-7%
15	90	0%	-3%
16	90	1%	-5%

