

## Rozino Wall Grazer Mud-In 2.5 in.

### Trimless Recessed Perimeter Wall Grazer

#### Specification Submittal


Rozino Wall Grazer Mud-In 2.5 in. is a powerful wall grazer featuring a focused 10° beam angle. Built with a curved reflector to evenly spread light down large walls, this fixture provides a beautifully deep grazing effect and the sophisticated illusion of a floating drop ceiling when installed around a room. Perfect for both commercial and sophisticated residential settings, Rozino Wall Grazer Mud-In 2.5 in. can graze the full length of large walls, highlighting architectural surface details with unparalleled clarity.

Project Name:

Project Location:

Fixture Type:



SKUs:

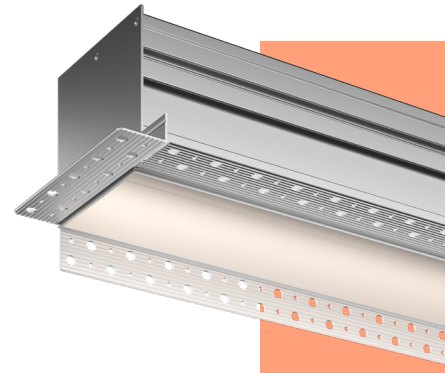

## Features & Benefits

- Offers a focused 10° beam angle to accentuate fine textures and details with ease
- Curved interior reflector creates uniform volume of illumination within the cove
- The deep optical cavity creates an illuminated reveal, delivering the visual effect of a floating drop ceiling when installed around a room
- Paintable surface ensures seamless integration with any décor or color palette
- Superior CRI 95+ color rendering, with high R9 and R13 values
- UL listed luminaire
- Patent-pending design provides a completely recessed wall grazing solution for precise lighting down the entire depth of large walls

## System Builder

Prefix	Location	Output	CCT	Lens	Finish	Length	Lead	Lead Length 1	Lead Length 2
OP-REC-ROZWGM2.5	I	L4		LGD	ALU				
	I Indoor	L4 - 2700K - 447 lm/ft (6W) 3000K - 457 lm/ft (6W) 3500K - 479 lm/ft (6W) 4000K - 494 lm/ft (6W)	2700K 3000K 3500K 4000K	LGD Low-Glare Diffuser		XXX Length in 1 in. increments  - The fixtures come in segments up to 96 in.  - If over 96 in., multiple segments of the profile will be supplied. The light engine will be cut to length with standard 3 ft. leads	1LEAD One lead   2LEAD Two leads (one at each end) 	XXX 1-120 in.	XXX 1-120 in.

Fixtures are supplied with Optique's remote Universal power supply supporting 0-10, 1-10V, MLV, ELV dimming and voltage input from 100V-277V.


## Rozino Wall Grazer Mud-In 2.5 in.

### Trimless Recessed Perimeter Wall Grazer


Specification Submittal

#### Dimensions

Fixture with End Cap

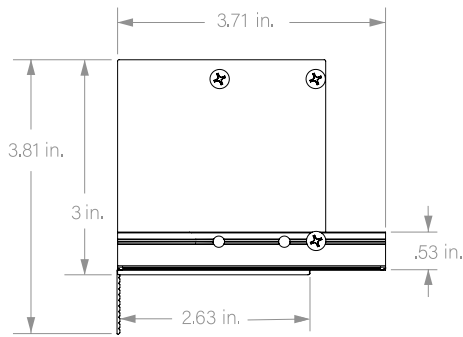

Fixture Cross Section

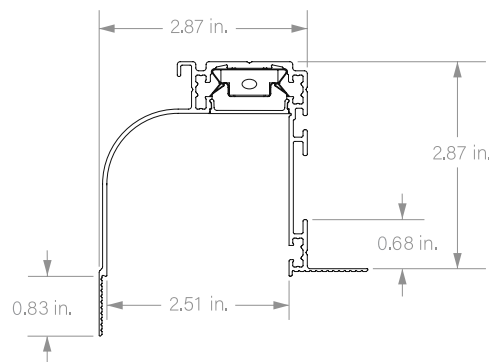


#### Output

Indoor

##### LUMEN SUMMARY

Zone	Lumens	% Fixture
0° - 15°	217 lm	47.4%
0° - 30°	320 lm	70.0%
0° - 45°	394 lm	86.2%
0° - 60°	433 lm	94.7%
0° - 75°	449 lm	98.2%
0° - 90°	454 lm	99.3%

##### ANGULAR DISTRIBUTION 0 - 90°

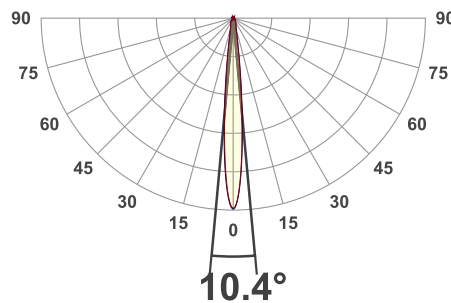

##### FOOT CANDLES

3000K Recessed Mud-In Wall Grazer

Distance	Foot Candles
1'	4766 fcd
1.5'	2118 fcd
2'	1191 fcd
2.5'	763 fcd
3'	530 fcd
4'	298 fcd
5'	191 fcd
6'	132 fcd
9'	59 fcd
12'	33 fcd

##### DISTRIBUTION OF FOOT CANDLES

8 ft., 3000K Recessed Mud-In Wall Grazer

